

### **Description**

The XE2F7VB TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning.

The XE2F7VB is in a DFN1006-2L package and will protect one unidirectional line. It may be used to provide ESD protection up to  $\pm 30$ kV (Contact and air discharge) according to IEC61000-4-2 , and withstand peak current up to 6A for 8/20 us according to IEC61000-4-5.

#### **Features**

- ♦ Working voltage: 7V
- ◆ DFN1006-2L Package
- ◆ Transient protection for data lines to IEC 61000-4-2 (ESD) ±30kV (air),

 $\pm$ 30kV (contact)

IEC 61000-4-5 (Surge) 6A (8/20us) IEC61000-4-4 (EFT) 40A (5/50ns)

- ◆ Low leakage current
- Low clamping voltage
- Solid-state silicon-avalanche technology


## **Applications**

- ◆ Power lines
- Personal digital assistants (PDA's)
- Microprocessors based equipment
- Notebooks, Desktops, and Servers
- ◆ Cell phone Handsets and Accessories
- Portable Electronics
- Peripherals

## http//:www.xihangsemi.com



#### DFN1006-2L (Bottom View)



### **Circuit Diagram**



7A= Device code

Marking (Top View)

#### Order Information


Device	Package	Shipping
XE2F7VB	DFN1006-2L	10000/Tape&Reel

Rev.1.0 1 www.xihangsemi.com



## **Definitions of electrical characteristics**

Symbol	Parameter	
$V_{RWM}$	Reverse Stand-off Voltage	
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>	
$V_{BR}$	Reverse Breakdown Voltage @ I⊤	
I <sub>R</sub>	Reverse Breakdown Current	
I <sub>PP</sub>	Reverse Peak Pulse Current	
Vc	Clamping Voltage @ I <sub>PP</sub>	



## **Absolute Maximum Rating**

Rating	Symbol	Value	Units
Peak Pulse Power ( t <sub>P</sub> = 8/20µS )	P <sub>PK</sub>	84	W
Peak Pulse Currentr ( t <sub>P</sub> = 8/20µS )	I <sub>pp</sub>	6	А
ESD according to IEC61000-4-2 air discharge	V	±30	kV
ESD according to IEC61000-4-2 contact discharge	$V_{ESD}$	±30	kV
Lead Soldering Temperature	T∟	260 (10 sec)	°C
Operating Temperature	T <sub>OP</sub>	-55 to +125	°C
Storage Temperature	T <sub>STG</sub>	-55 to +150	°C

# Electrical Characteristics (Ta=25℃, unless otherwise noted)


Parameter	Symbol	Conditions	Min.	Тур.	Max.	Units
Reverse Stand-off Voltage	$V_{RWM}$				±7	٧
Reverse Leakage Current	I <sub>R</sub>	V <sub>RWM</sub> =7V			100	nA
Reverse Breakdown Voltage	$V_{BR}$	I <sub>T</sub> =1mA	7.6	8	10	٧
		I <sub>PP</sub> =1A t <sub>P</sub> = 8/20μs		9	11	٧
Clamping Voltage <sup>1)</sup>	$V_{CL}$	$I_{PP}$ =6A $t_P$ = 8/20 $\mu$ s		12	14	٧
Junction Capacitance	Cj	V <sub>R</sub> =0V f = 1MHz		15		pF


#### Notes:

<sup>1)</sup>Non-repetitive current pulse, according to IEC61000-4-5.




## Typical Characteristics (Ta=25℃, unless otherwise noted)






8/20μs waveform per IEC61000-4-5


Contact discharge current waveform per IEC61000-4-2







Non-repetitive peak pulse power vs. Pulse time

Power derating vs. Ambient temperature









ESD clamping (-8kV contact discharge per IEC61000-4-2)






# Package Outline Dimensions (DFN1006-2L)

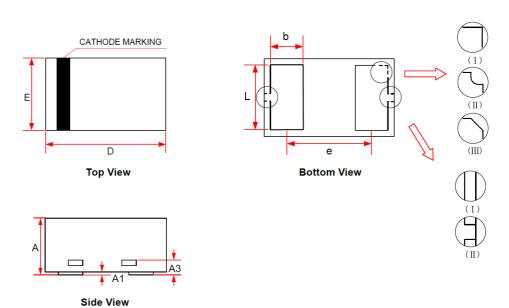

Complete	D	Dimensions in Millimeters			
Symbol	Min.	Тур.	Max.		
A	0.340	0.450	0.530		
A1	0.000	0.020	0.050		
A3		0.125 Ref.			
D	0.950	1.000	1.075		
E	0.550	0.600	0.675		
b	0.200	0.250	0.300		
L	0.450	0.500	0.550		
е		0.650 BSC			



# Recommend Land Pattern (Unit: mm)




### Note:

This recommended land pattern is for reference purpose only.



### Load with information

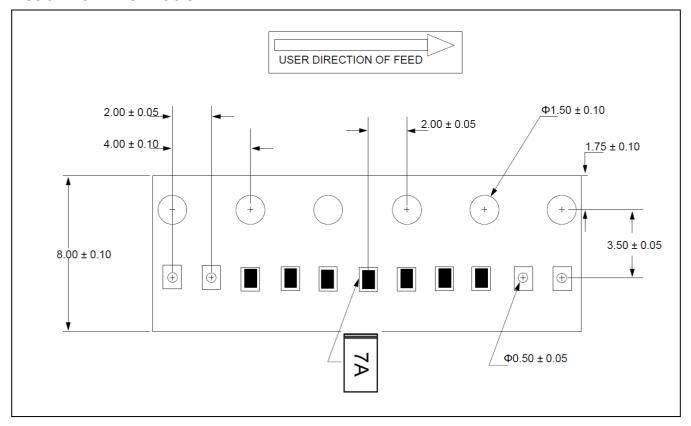

Unit: mm

#### NOTICE

XIHANG's products are not authorized for use as components in any life support device or systems.

XIHANG reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. XIHANG does not assume any liability arising out of the application or use of any product described herein.